

IB/2004/052738

REC'D 13 DEC 2004

WIPO

PCT

PA 1116321

**THE UNITED STATES OF AMERICA**

**TO ALL TO WHOM THESE PRESENTS SHALL COME:**

**UNITED STATES DEPARTMENT OF COMMERCE**

**United States Patent and Trademark Office**

**January 20, 2004**

**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.**

**APPLICATION NUMBER: 60/528,636 ✓**

**FILING DATE: December 11, 2003 ✓**

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

**By Authority of the  
COMMISSIONER OF PATENTS AND TRADEMARKS**

*P. Swain*

**P. SWAIN  
Certifying Officer**

Please type a plus sign (+) inside this box → 

PTO/SB/16 (02-01)  
Approved for use through 10/31/2002. OMB 0851-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53 (c).

Express Mail Label No. EV312 068 621

Date of Deposit: **11 DECEMBER 2003**

### INVENTOR(S)

Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)
CRAIG	BLACK	20220 106 <sup>TH</sup> DR. SE, SNOHOMISH, WA,US, 98296

☐ Additional inventors are being named on the \_\_\_\_\_ separately numbered sheets attached hereto

### TITLE OF THE INVENTION (280 characters max)

TWIN DUCKBILL VALVE ASSEMBLY

### CORRESPONDENCE ADDRESS

Direct all correspondence to:

☒ Customer Number

24737

OR

Type Customer Number here

**\*24737\***

15 1511 1511 1511 1511 1511

☐

Firm or  
Individual Name

Address

Address

City

State

ZIP

Country

Telephone

Fax

### ENCLOSED APPLICATION PARTS (check all that apply)

☒ Specification Number of Pages

5

☐ CD(s), Number

☒ Drawing(s) Number of Sheets

2

☐ Other (specify)

☐ Application Data Sheet. See 37 CFR 1.76

### METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)

☐ Applicant claims small entity status. See 37 CFR 1.27.

☐ A check or money order is enclosed to cover the filing fees

FILING FEE  
AMOUNT (\$)

☒ The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number:

14-1270

160.00

☐ Payment by credit card. Form PTO-2038 is attached.

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No.

☐ Yes, the name of the U.S. Government agency and the Government contract number are: \_\_\_\_\_.

Respectfully submitted,

SIGNATURE

*Ernestine C. Bartlett*

Date:

10 DECEMBER 2003

TYPED or PRINTED NAME

ERNESTINE C. BARTLETT

REGISTRATION NO.: 22,861

(if appropriate)

Docket Number:

US030491

TELEPHONE

(914) 333-9640

### USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C., 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Alexandria, VA 22313-1450.

### TWIN DUCKBILL VALVE ASSEMBLY

This invention relates generally to the field of duckbill valves, and more specifically concerns a new duckbill valve arrangement.

5 Duckbill valves are in general well known. A duckbill valve includes a slit at a front (upper) end thereof which under positive differential pressure opens to permit exit of fluid therethrough. Otherwise, the slit is closed and resistant to backflow under negative pressure. Various shapes and sizes of duckbill valves are used for particular applications. One example is the use of a duckbill valve in fluid-dispensing toothbrushes.

10 However, the currently available duckbill valves used in toothbrushes have been known to fall out of the toothbrush bristle plate, or can be easily pulled out from the bristle plate in which they are mounted. Further, there is typically no easy, reliable way to properly orient the duckbill valve in the bristle plates using automated manufacturing equipment. Hence, the duckbill valve may end up with the slit at various orientations in the bristle plate.

15 In addition, conventional duckbill valves can become clogged, or the exiting fluid may not cover the desired area because of limitations in existing duckbill valve configurations. Further, particularly for toothbrushes, there may be a need to deliver more than one fluid, which results in fluid path complexity to the duckbill valve.

20 It would be desirable to have a duckbill valve which overcomes one or more of the disadvantages discussed above.

Accordingly, the present invention is a duckbill valve assembly, comprising:

At least two duckbill valve members; and a flange member which extends between and joins the duckbill valve members in a particular orientation.

25 Figure 1 is an exploded view showing the duckbill valve of the present invention in a stem/brushhead portion of a toothbrush.

Figure 2 is a perspective view of the duckbill valve shown in Figure 1.

Figure 3 is a front view of a toothbrush stem/brushhead with the duckbill valve of Figures 1 and 2.

30 Figure 4 is a cross-sectional view of a toothbrush brushhead with the duckbill valve of Figures 1 and 2.

Referring now to Figure 2, the twin duckbill valve assembly of the present invention, shown generally at 10, includes two individual duckbill valve members 12 and

14 joined by a flange 16 at the respective bases thereof. Duckbill valve members 12 and 14 are similar to conventional duckbill valves in that they have a circular lower portion 18 and a tapered upper portion 20 with a rectangular upper surface 21. Each duckbill valve member 12 and 14 is hollow, with an open base (lower end) to receive fluid and a slit 22 in upper surface 21 which extends for most of the length of upper surface 21, through which fluid exits the valve. The duckbill valve members 12 and 14 are made from a flexible material, such as rubber.

Under positive differential pressure, slit 22 opens to allow the free flow of fluid through the valve. Under negative pressure, backflow through the valve is prevented because the slit 22 remains firmly closed. Again, the basic structure of a duckbill valve is well known; a wide variety of duckbill valve sizes and configurations are available from various manufactures for different applications.

In applicant's invention, flange 16 joins the base of the two duckbill valve members, thereby creating a unitary article and maintaining the separate valve members in a fixed spatial relationship.

In the embodiment shown, flange 16 is also made of flexible material and is approximately 0.5 mm thick. While flange 16 can have various configurations, the configuration shown in Figure 2, which includes two straight parallel longitudinal sides 28 and 30, with curved end portions 32 and 34 joining the longitudinal sides and extending slightly beyond the edge of the duckbill valve members, is preferred for ease of manufacturing. In the embodiment shown, flange 16 is 13.8 mm long, approximately 4.2 mm wide, with the centerlines of the two duckbill members being separated by 10.5 mm. These dimensions can be varied for different applications.

Figure 1 shows an exploded view of the twin duckbill valve assembly 10 in a toothbrush application. Figures 3 and 4 show views of the assembled combination. Duckbill valve assembly 10 is inserted into a cavity 42 in bristle plate 44, with the two individual duckbill valve members 12 and 14 extending through spaced openings in a remaining thickness portion 48 of the bristle plate, such that they extend into the field of bristles 50 mounted on the bristle plate 44. A holding member 55 is then positioned over the duckbill valve assembly 10 in cavity 42, holding the assembly in place therein against the remaining thickness portion 48 of the bristle plate. The inserted holding member is configured to define cavities 57 or channels in the bristle plate which receive fluid from a

reservoir through stem portion 58. The open bases of the duckbill members are in fluid communication with the cavity in the bristle plate through openings 52 and 54 in flange 16. This arrangement allows fluid under positive pressure to flow into the individual duckbill valve members 12 and 14 and out through the slitted upper ends thereof into  
5 bristle field 50.

While the arrangement shown includes two individual duckbill valve members which are oriented such that their slits 22-22 are parallel to each other laterally across flange 16, the two duckbill valve members could be oriented so that the slits are in a single line along the toothbrush (in a single vertical plane).

10 Furthermore, it should be understood that there may be more than two duckbill valve members in a particular assembly. Still further, the individual duckbill valve members, respectively, could have different sizes and/or shapes, different from each other, to accommodate two different liquids. If the two duckbill valve members are connected to the same fluid path, however, it is advantageous for the two duckbill valve members to be  
15 of the same size, shape and orientation. Still further, in a toothbrush application, it is advantageous for the duckbill valve members to be separated by a distance, to accommodate bristles in the bristle field therebetween, such as shown particularly in Figure 1.

There are several advantages to the multiple duckbill valve assembly of the present  
20 invention. First, it permits an easy automatic assembly with proper duckbill orientation, as the duckbill valve assembly can only fit into the bristle plate in one orientation. Still further, it is very difficult to pull the duckbill out from the bristle plate, since the flange 16 abuts the inner surface of the remaining thickness portion 48 of the bristle plate. Also, as indicated above, the present duckbill assembly structure can accommodate two separate  
25 fluid paths through the toothbrush stem for two different fluids. Hence, the multiple duckbill valve assembly of the present invention overcomes disadvantages of a single duckbill assembly, but also has additional advantages thereover.

Although a preferred embodiment of the invention has been disclosed for purposes of illustration it should be understood that various changes, modifications and substitutions  
30 may be incorporated in the embodiment without departed from the spirit of the invention which is defined by the claims as follows:

CLAIMS:

1. A duckbill valve assembly, comprising:  
at least two duckbill valve members; and  
a flange member extending between and joining the duckbill valve members in a particular orientation.
2. The assembly of claim 1, wherein the flange member joins the two duckbill valve members at their respective bases, and wherein the flange member is substantially flat.
3. The assembly of claim 1, wherein the duckbill valve members have slit openings through which fluid moves and are spaced apart from each other, but arranged so that their respective slit openings are parallel.
4. The assembly of claim 1, wherein the duckbill valve members have slit openings through which fluid moves and are oriented such that their respective slit openings are in a single line.
5. The assembly of claim 1, wherein the duckbill valve members are substantially identical.
6. The assembly of claim 1, wherein the two duckbill valve members are sufficiently separated to permit a plurality of bristles to be mounted therebetween when the duckbill assembly is part of a toothbrush brushhead.
7. The assembly of claim 1, wherein the duckbill valve assembly includes just two duckbill valve members.
8. The assembly of claim 1, wherein the duckbill valve assembly includes more than two duckbill valve members.
9. The assembly of claim 1, wherein the duckbill valve members are different in size and otherwise arranged to accommodate different fluids to flow therethrough.

ABSTRACT

The duckbill valve assembly includes at least two duckbill valve members and a flexible, flat flange member which joins the two duckbill valve members together. The flange connects the duckbill valve members together at their respective bases, thereby  
5 maintaining the two duckbill valve members in a particular orientation and arrangement relative to each other.

FIG. 1

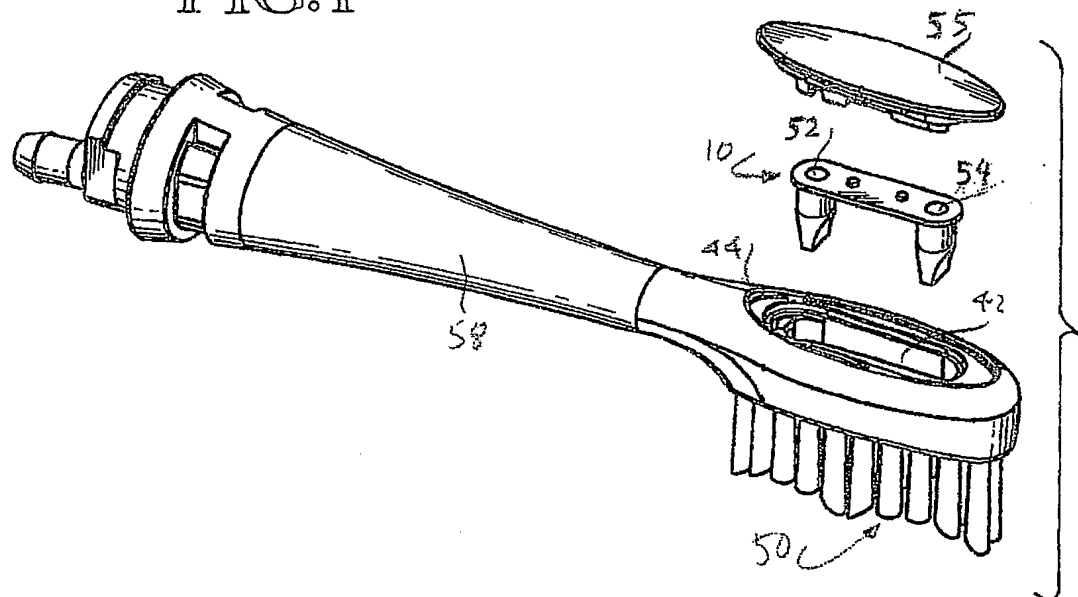
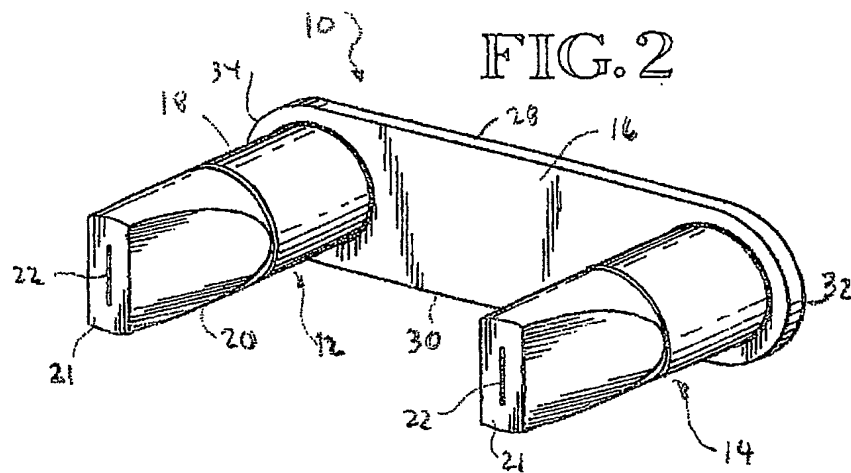


FIG. 2





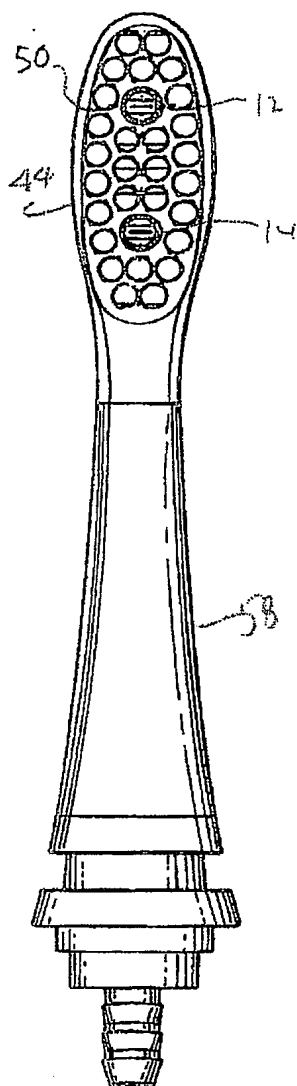


FIG. 3

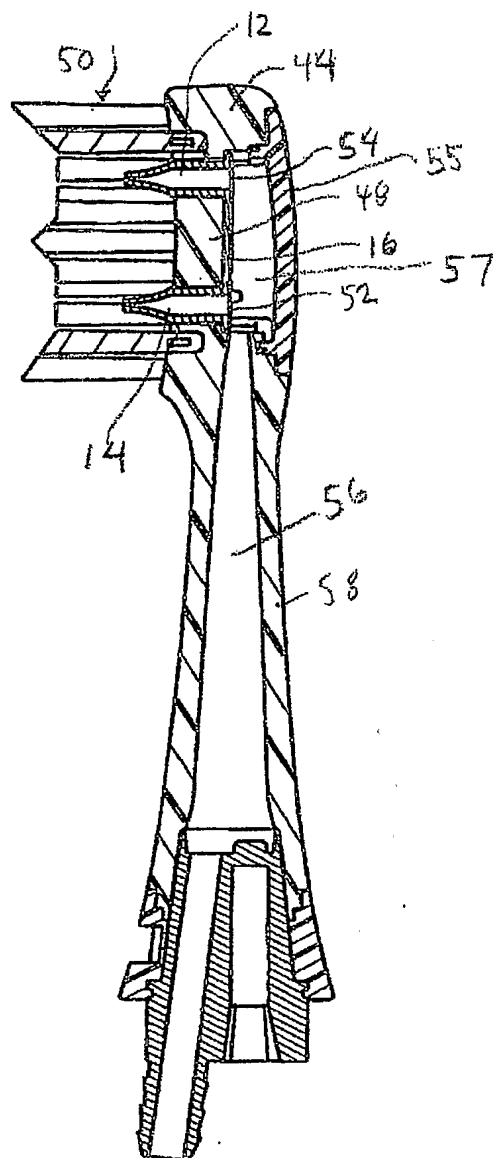


FIG. 4